

Exam4Labs



- ✓ Online Tool, Convenient, easy to study.
- ✓ Instant Online Access
- ✓ Supports All Web Browsers
- ✓ Practice Online Anytime
- ✓ Test History and Performance Review
- ✓ Supports Windows / Mac / Android / iOS, etc.



- ✓ Installable Software Application
- ✓ Simulates Real Exam Environment
- ✓ Builds Exam Confidence
- ✓ Supports MS Operating System
- ✓ Two Modes For Practice
- ✓ Practice Offline Anytime



- ✓ Printable PDF Format
- ✓ Prepared by IT Experts
- ✓ Instant Access to Download
- ✓ Study Anywhere, Anytime
- ✓ 365 Days Free Updates
- ✓ Free PDF Demo Available



Security & Privacy

We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.



365 Days Free Updates

Free update is available within 365 days after your purchase. After 365 days, you will get 50% discounts for updating.



Money Back Guarantee

Full refund if you fail the corresponding exam in 90 days after purchasing. And Free get any another product.



Instant Download

After Payment, our system will send you the products you purchase in mailbox in a minute after payment. If not received within 2 hours, please contact us.

<http://www.exam4labs.com/>

Exam4labs is a leading provider of latest certification exam study materials. Help you pass and get the certification easily.

Exam : **DES-1221**

Title : Specialist - Implementation
Engineer, PowerStore
Solutions Exam

Vendor : EMC

Version : DEMO

NO.1 When planning rack layout, why should base enclosures be grouped together?

- A. Rack weight balance
- B. Power distribution requirements
- C. Ease of cable management
- D. Hot aisle requirement

Answer: C

NO.2 A PowerStore X system is being implemented using Dell EMC S5248F-ON Ethernet switching as data switches.

What is required when configuring the VLT interconnects on the data switches?

- A. On each switch, select the switch management port MAC as the VLT MAC
- B. Set the VLT connection to the switch default VLAN
- C. Assign the switch default route for the VLT traffic
- D. Configure the VLT MACs with a matching unique made-up address

Answer: D

NO.3 What is the significance of the warning given when a volume with data services is deleted?

- A. Volume is mapped to a host
- B. Snapshot is present on the volume
- C. Volume is participating in a migration
- D. Protection policy is configured on the volume

Answer: B

Reference: [https://www.dell.com/support/manuals/en-pk/powerstore/pwrstr-cfg-vols/delete-a-volume?](https://www.dell.com/support/manuals/en-pk/powerstore/pwrstr-cfg-vols/delete-a-volume?guid=guid-26e8c12d-a3df-4d4d-8012-ae2ef9e53721&lang=en-us)

[guid=guid-26e8c12d-a3df-4d4d-8012-ae2ef9e53721&lang=en-us](https://www.dell.com/support/manuals/en-pk/powerstore/pwrstr-cfg-vols/delete-a-volume?guid=guid-26e8c12d-a3df-4d4d-8012-ae2ef9e53721&lang=en-us)

NO.4 How many cables are required for minimum support for PowerStore T Front-End storage connectivity?

- A. 1
- B. 2
- C. 4
- D. 6

Answer: C

Explanation

PowerStore T model appliances also require at least one management switch.

The minimum cabling requirements in Table 6 must be met.

Table 6 Minimum cabling requirements for PowerStore T models

PowerStore connection	Switch connection
Node A port 0 of 4-port card embedded module	Physical Ethernet switch 1
Node A port 1 of 4-port card embedded module	Physical Ethernet switch 2
Node B port 0 of 4-port card embedded module	Physical Ethernet switch 2
Node B port 1 of 4-port card embedded module	Physical Ethernet switch 1
Node A 1 GbE management port	Management switch
Node B 1 GbE management port	Management switch

Figure 16 outlines the minimum cabling that is required for PowerStore T appliances.

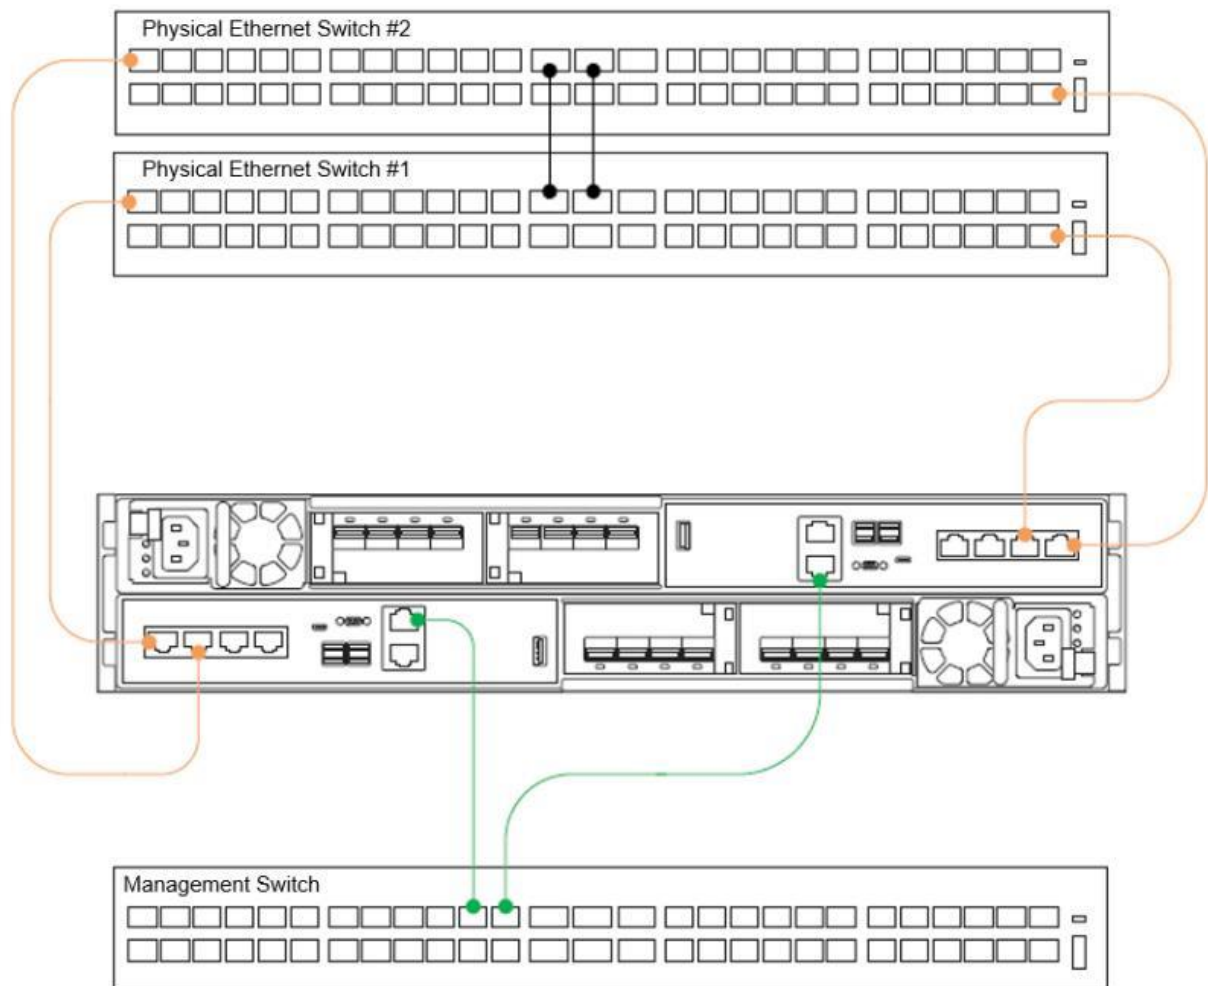


Figure 16 PowerStore T model appliance minimum cabling

NO.5 At what point in the configuration of an External Storage Import session does the data path from the host to the PowerStore system become the active IO path?

- A.** Before launching the Import Storage wizard
- B.** When the import session begins
- C.** As MPIIO restarts on the host
- D.** During the ImportKit installation

Answer: B